
## **ROUND DUAL-BLADE DAMPER**



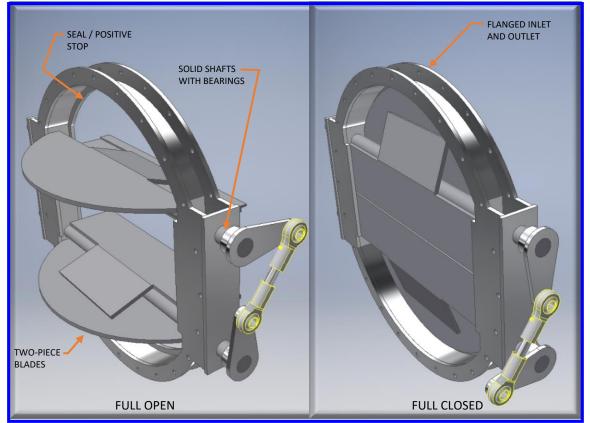

## **Application:**

- Use for tight shut-off or balancing of an airstream with a large round duct
- Sizes ranging from 36" to 102" diameter
- Differential pressure: up to 50 inWC

## **Features:**

- Flanged inlet and outlet connections
- Tight sealing positive-stop blades
- Can be fitted with gear box with chain wheel, positioned rotary actuator, or cylinder-lever actuator
- Can be fitted with anti-friction bearings or plain bearings with packing for high temperature applications
- Levers and link rod with spherical rod ends ensure blades move symmetrically
- Available in stainless steels or painted carbon steel

## **Benefits:**

- Short flange to flange connection
- Downstream air flow is more uniform than it would be with a single blade damper
- Simple, reliable, and easy to maintain
- Heavy-duty construction

**DA-11**